


Low Pressure Single Stage Regulators

LV2302 Series

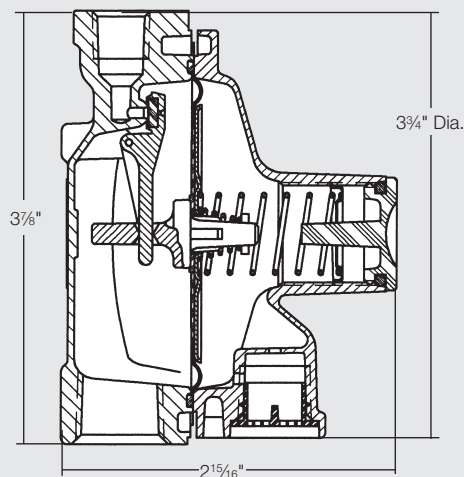

Application


A compact, sturdy regulator incorporating many of the quality features found in larger domestic regulators. Ideal for outdoor LP-Gas grills. The regulator reduces cylinder pressure down to burner pressure, normally 11" w.c. It is intended for use on small portable appliances that use 100,000 BTU's/hr. or less. It may not be used on fixed pipe systems per NFPA 58, 1995 edition.

Features

- Compact size with large capacity rating.
- Equipped with integral relief valve.
- Unique bonnet vent profile minimizes vent freeze over when properly installed.
- Built in pressure tap has plugged 1/8" F.NPT outlet.
- Large diaphragm provides better regulation and lower lock-up.
- Classic gold finish.

Materials

Body Die Cast Zinc
Bonnet Die Cast Zinc
Spring Steel
Valve Seat Disc Resilient Rubber
Diaphragm Integrated Fabric and Synthetic Rubber

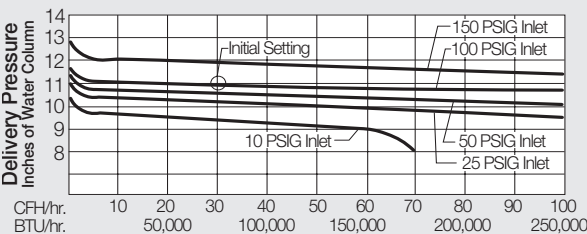

Ordering Information

Part Number	Inlet Connection	Outlet Connection	Orifice Size	Factory Delivery Pressure	Adjustment Range	Bonnet Vent Position	Vapor Capacity BTU/hr. Propane*
LV2302A2	1/4" F. NPT	3/8" F. NPT	No. 49 Drill	11" w.c. at 100 PSIG Inlet	9" - 13" w.c.	Over Outlet	150,000
LV2302P	M. POL						

* Maximum flow based on 10 PSIG inlet and 9" w.c. delivery pressure.